

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

Patent Claims:

1. Process for the partial thermochemical vacuum treatment of metallic workpieces (1), in particular for the carburization and case-hardening of workpieces (1) of case-hardening steel in a carbon-containing atmosphere, wherein surface regions (3, 4, 5, 6) to be treated and surface regions not to be treated abut one another, and wherein the surface regions not to be treated are covered during the treatment of the remaining surface regions (3, 4, 5, 6) by reusable mould bodies (11) of a temperature-resistant material, characterised in that for the simultaneous treatment of several workpieces (1) with defined cavities (2) the workpieces (1) are installed in a mould body (11) having at least one mould cavity (15) and several openings (12b, 13b) through which the carbon-containing atmosphere enters the cavities (2) of the workpieces (1), in which the mould body (11) encloses the workpieces (1) in such a way that no thermochemical treatment takes place on the external surface regions of the said workpieces (1).
2. Process according to claim 1, characterised in that in each case at least one surface region of the cavity (2) of the workpiece (1) is screened by means of an inserted sleeve (8) against a thermochemical treatment, whereas at least one further surface region (3, 4, 5) of the cavity (2) is subjected to the thermochemical treatment.
3. Process according to claim 1, characterised in that the thermochemical treatment is carried out under the

207501-103102

action of a plasma and that the mould body (11) consists of an electrically conducting material.

4. Process according to claim 1, characterised in that a  
5 mould body (11) having a plurality of mould cavities  
(15) is used for receiving in each case one  
workpiece (1).
5. Process according to claim 1, characterised in that  
10 the mould body (11) is formed as a housing with an  
upper part (13) and that at least the upper part (13)  
has openings (13b) that communicate with the cavities  
(2) in the workpieces (1) and through which the  
15 carbon-containing atmosphere enters the said  
workpieces (1).
6. Process according to claim 1, characterised in that  
between the surface regions not being treated of the  
workpieces (1) and the mould body (11) sleeves (7, 8)  
20 are employed for sealing purposes.
7. Process according to claim 1, characterised in that a  
plurality of mould bodies (11) are combined to form a  
batch (17).
- 25
8. Process according to claim 1, characterised in that  
the process is carried out in a vacuum range between  
10 Pa and 3000 Pa, preferably between 50 Pa and  
1000 Pa.
- 30
9. Process according to claim 2, characterised in that  
the process is carried out with plasma voltages of

10080921.103100

between 200 and 2000 volts, preferably between 300 and 1000 volts.

10. Process according to claim 9, characterised in that  
5 the plasma is used in pulsed form.
11. Process according to claim 10, characterised in that  
the connection time is between 10 and 200  $\mu$ s and the  
pause time is between 10 and 500  $\mu$ s.
- 10 12. Process according to claim 1, characterised in that  
the carbon-containing gas is at least one hydrocarbon  
selected from the group comprising methane, ethane,  
propane and acetylene.
- 15 13. Process according to claim 12, characterised in that  
at least one gas from the group comprising argon,  
nitrogen and hydrogen is added to the carbon-  
containing gas, the proportion of the at least one  
20 hydrocarbon being chosen between 10 and 90 vol. %.
14. Process according to claim 1, characterised in that  
graphite is used as material for the mould  
bodies (11).
- 25 15. Process according to claim 1, characterised in that  
CFC is used as material for the mould bodies (11).
16. Process according to claim 1, characterised in that a  
30 material that does not exhibit any distortion  
phenomena at least up to a temperature of 1050°C,

10080921-103102

preferably up to 1200°C, is used as material for the mould bodies (11).

17. Process according to claim 3, characterised in that  
5 the plasma-side ends of the at least one mould  
cavity (15) of the mould bodies (11) are formed in a  
plasma-tight manner opposite the respective  
workpiece (1).
- 10 18. Process according to claim 1, characterised in that  
the workpieces (1) within the mould body (11) are  
subjected to a heating procedure before the  
carburization.
- 15 19. Process according to claim 1, characterised in that  
the workpieces (1) within the mould body (11) are  
subjected to a diffusion procedure after the  
carburization.
- 20 20. Process according to claim 1, characterised in that  
the workpieces (1) within the mould body (11) are  
subjected to a high pressure gas quenching after the  
diffusion procedure.
- 25 21. Process according to claim 1, characterised in that  
the workpieces (1) within the mould body (11) are  
subjected after the high pressure gas quenching to at  
least one further treatment from the group consisting  
of deep cooling and annealing.
- 30 22. Apparatus for use in a single-chamber unit or in a  
multi-chamber throughflow unit for the partial  
thermochemical vacuum treatment of metallic workpieces

10080921-103102

(1), in particular for the carburization and case-hardening of workpieces (1) of case-hardening steel in a carbon-containing atmosphere, wherein surface regions (3, 4, 5, 6) to be treated and surface regions not to be treated abut one another, and at least one reusable mould body (11) that consists of a temperature-resistant material is provided to cover surface regions not to be treated during the treatment of the remaining surface regions (3, 4, 5, 6), characterised in that in the mould body (11) several mould cavities (15) are provided for the insertion of several workpieces (1), wherein the workpieces (1) can be enclosed in the mould cavity (15) in such a way that no thermochemical treatment takes place on the external surfaces of the workpieces (1).

23. Apparatus according to claim 22, characterised in that the mould body (11) is formed as a housing and consists of an electrically conducting material and that the workpieces (1) can be enclosed in the mould cavity (15) in such a way that when using a plasma no plasma is formed between the mould body (11) and the workpieces (1).

24. Apparatus according to claim 22, characterised in that the mould body (11) for the treatment of the workpieces (1) with cavities (2) that are subjected to a thermochemical vacuum treatment has several openings (12b, 13b) that communicate with the cavities (2) of the in each case associated workpieces (1).

25. Apparatus according to claim 22, characterised in that the mould body (11) is formed as a housing with an

upper part (13), and that at least the upper part (13) has several openings (13b) that communicate with the cavities (2) in the in each case associated workpieces (1).

5

26. Apparatus according to claim 25, characterised in that the mould body (11) comprises a lower part (12) that has several openings (12b), and that the axes of the openings (13a, 12a) in the upper part (13) and in the lower part (12) coincide.

10

27. Apparatus according to claim 26, characterised in that between the lower part (12) and upper part (13) of the mould body (11) there is arranged a separating groove (14) running along the circumference, which permits a telescopic movement between the lower part (12) and upper part (13).

15

28. Apparatus according to claim 23, characterised in that the plasma-side ends of the openings (12b, 13b) in the mould body (11) opposite the respective workpiece (1) are formed in a plasma-tight manner.

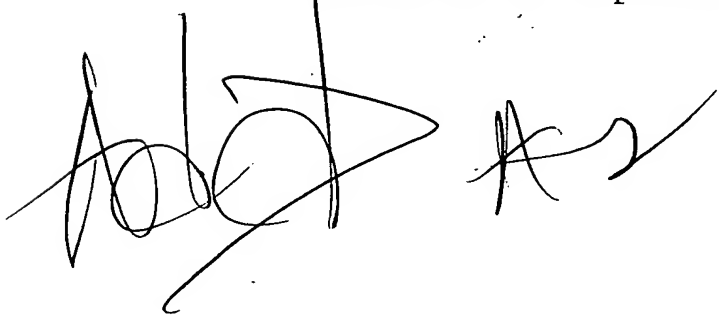
20

29. Apparatus according to at least one of claims 22 to 28, characterised by sleeves (7, 8) that can be inserted between the workpiece (1) and the lower part (12) on the one hand and between the workpiece (1) and the upper part (13) on the other hand, and which match the workpiece (1) in such a way that surface regions of the workpieces (1) not being treated are excluded from the thermochemical treatment.

25

30

10080921-103102

30. Apparatus according to claim 22, characterised in that a plurality of mould bodies (11) are combined by means of a transporting frame (16) to form a batch (17).
- 5 31. Apparatus according to claim 30, characterised in that the transporting frame (16) comprises crosspieces (18) for arranging mould bodies (11) next to one another and on top of one another.
- 10 32. Apparatus according to claim 22, characterised in that the mould body (11) consists of graphite.
33. Apparatus according to claim 22, characterised in that the mould body (11) consists of CFC.
- 15 34. Apparatus according to claim 22, characterised in that as material for the mould bodies (11) a material is used that does not exhibit any distortion phenomena at least up to a temperature of 1050°C, preferably up to 20 1200°C.
- 25 35. Apparatus according to claim 23, characterised in that the mould body (11) is arranged within an evacuable chamber (22) with an inlet for at least one hydrocarbon and is connected as a cathode for the formation of a plasma.
- 

10080921 103102  
207207 1268007